

bluecool
● ● ● WATER DISPENSERS

U2



Unrivalled performance

Solidly practical and visually striking, this innovative range brings a high capacity refreshment solution to any Horeca environment.



Dimensions	WxDxH
Undercounter	270x240x400mm
Twin Head Tap	220x250x350mm
Dispense Height	250mm
Max power consumption	
Chilled & Sparkling	405W
Chilled & Ambient	365W

Dimensions	WxDxH
Undercounter	262x450x485mm
Triple Head Tap	220x250x470mm
Dispense Height	285mm
Max power consumption	
Chilled, Ambient & Sparkling	405W

Power requirements	
Hertz 50/Volts 240	
Chilled Temperature	
Min 2°C /Max 8°C	
Throughput litres per hour	
Chilled 30/60	

Key Features

- Robust, solid build quality
- Simple to operate and maintain
- Aesthetically striking
- Compact undercounter unit
- High capacity output
- Install Kit with filter included
- Available in chilled, ambient and sparkling

Available accessories


- Sanitisation Kit
- Sparkling Refill (CO₂E290) (600g)
- CO₂ Regulator with Gauge
- Large Driptray
- Blue Tint Cups (7oz)




Water options



Chilled

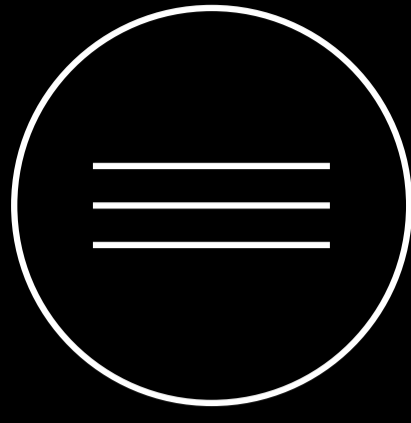


Ambient

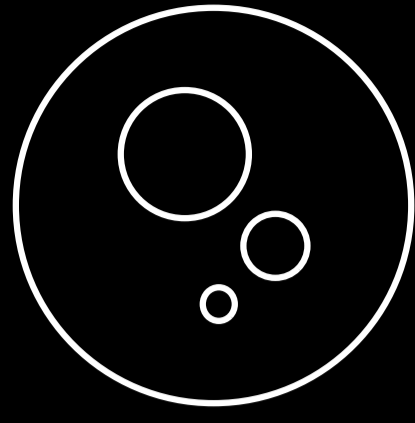


Sparkling

Configuration

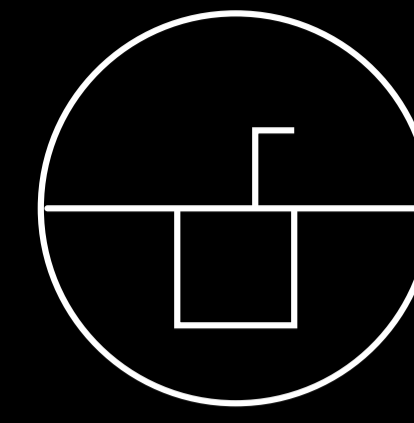

Undercounter


Recommended environment

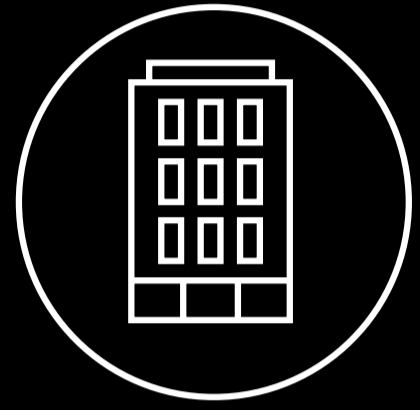

Offices




Hospitality

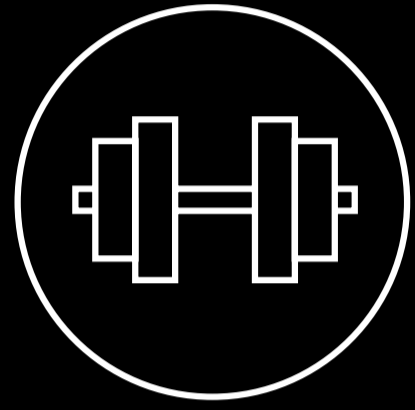


Leisure

Number of users

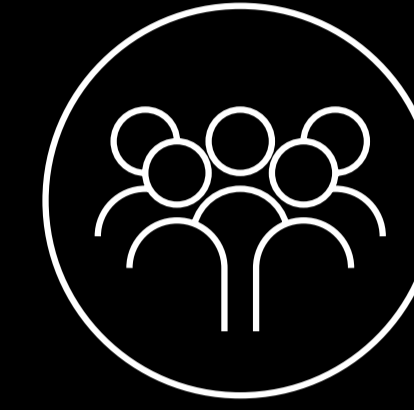

11-25

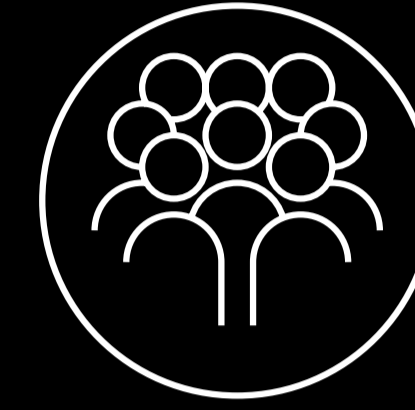

25+


u2 Models

Direct Chill, Complete Undercounter System, Chilled & Ambient - 601350

Direct Chill, Complete Undercounter System, Chilled & Sparkling - 601380

Direct Chill, Complete Undercounter System, Chilled, Ambient & Sparkling - 601390

Water system

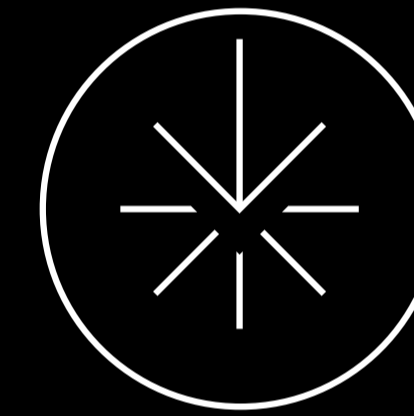

Direct Chill

Direct Chill system utilises innovative technology to chill water instantly. We recommend this system for more demanding environments because of its optimum dispense performance and unrivalled hygienic qualities. Superior to the gravity fed Reservoir system, Direct Chill technology chills water on demand for the ultimate drinking experience.

Phone

+353 (42) 935 2737

Email

info@bluecoolwater.ie

www.bluecoolwater.ie

Distributed by

Ref: 838145
Version: 13012015